



BRIDGE GUARDRAIL DAV H2/W1

The newly developed bridge guardrail, DAV H2/W1, is CE-marked according to the European standards and complies with the requirements in DS/EN 1317-2 and DS/EN 1317-5. With a post spacing of 3.0 metres, the guardrail can be mounted on bolt groups.


The guardrail can be installed with or without B-profiles, entirely according to customer preference, and with or without infill bars. All deflector beams are horizontal and equipped with deformation brackets, ensuring an ASI value of B. The A-bracket ensures force transmission. The railing is at minimum corrosion-protected to C3.

Bolts are delivered with rounded heads to avoid protruding edges.

The bridge guardrail is not CE-marked for lengths ≤ 36.6 m.

The bridge guardrail is not CE-marked for radii < 100 m.

The bridge guardrail is not CE-marked for transitions and installations on point foundations.

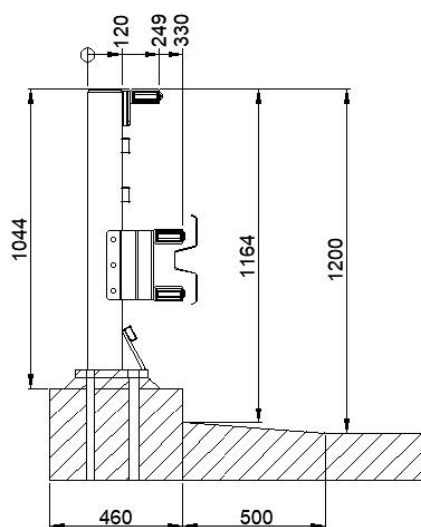

DAV H2/W1 is used on bridge constructions where normal requirements apply for a CE-marked bridge guardrail.



Post spacing, m	Height, m	Containment level	Working width	ASI-value	Test length, m
1,5	1,37	H2	W1	B	36,6

DAV NORDIC A/S
Tietgensvej 12
DK-8600 Silkeborg

DAV NORDIC A/S
Pilebækvej 5
DK-4632 Bjæverskov

DAV NORDIC A/S
+45 86822900
info@davnordic.dk

