




BRIDGE GUARDRAIL DAV H4B/W3

Newly developed bridge guard, DAV H4b/W3 is CE marked according to European standards and meets the requirements of EN 1317-2 and En 1317-5.

With a sceptre distance of 1.5 meters, the bridge guard can be mounted on bolt groups with or without tamping. The bridge guard can be mounted with or without B-profiles completely according to the customer's wishes, and with or without filling rods.

All reject-beams are horizontal and with built-in deformation bracket, which ensures an ASI value B. The A-bracket ensures power transmission. The railing is at least corrosion protected to C3.

Bolts are provided with rounded heads, to avoid protruding edges.

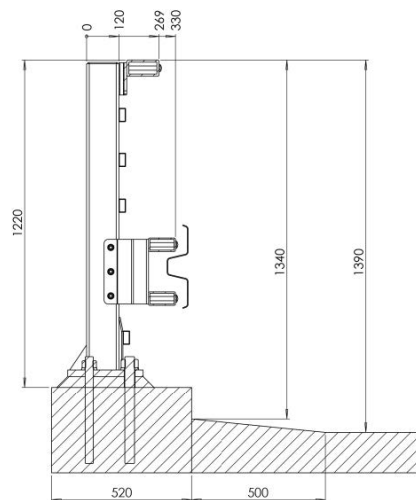

DAV H4b/W3 is primarily used on bridge structures where underlying areas require security for extra-protection.



Post spacing, m	Height, m	Containment level	Working width	ASI-value	Test length, m
1,5	1,37	H4b	W3	B	36,6

DAV NORDIC A/S
Tietgensvej 12
DK-8600 Silkeborg

DAV NORDIC A/S
Pilebækvej 5
DK-4632 Bjæverskov

DAV NORDIC A/S
+45 86822900
info@davnordic.dk

