



WOODEN GUARDRAIL

Tertü T18 is used in scenic areas such as parks, manor estates and forest landscapes.


The Tertü T18 wooden guardrail is tested and approved according to the European standards EN 1317-1 and EN 1317-2 (level 2).

The strength of the Tertü T18 primarily comes from the steel construction, which is recessed into the back of the posts and the longitudinal beams. The steel components included in the guardrail are hot-dip galvanized.

The pressure treatment of the wood is carried out according to the NTR standard and does not contain arsenic, which has been prohibited as a wood preservative in Denmark since 1993.

Advantages of the Tertü T18 wooden guardrail

- Reinforced with steel profiles on the back
- Pressure-treated for protection against rot, fungus and insect attack
- Long service life and resistance to wind and weather
- Fast installation thanks to the simple assembly system

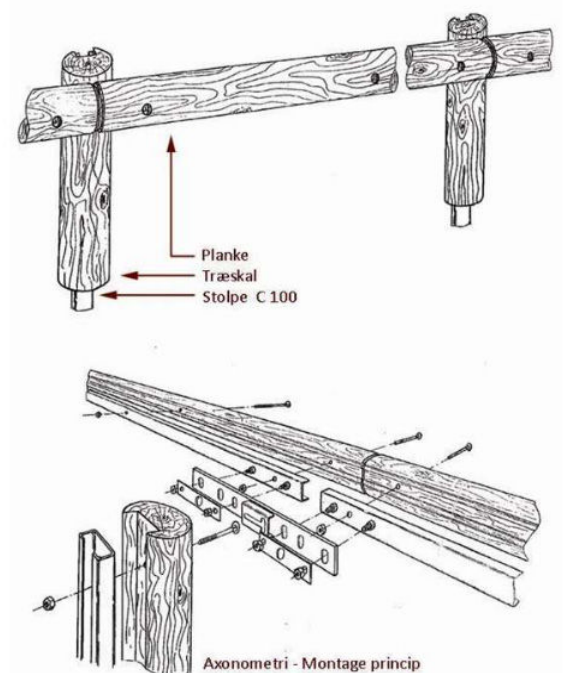



DAV NORDIC A/S
Tietgensvej 12
DK-8600 Silkeborg

DAV NORDIC A/S
Pilebækvej 5
DK-4632 Bjæverskov

DAV NORDIC A/S
+45 86822900
info@davnordic.dk

