



## CITY SWAN BRONZE 01



### Description / Materials

City Swan Bronze 01 is a lighting pole with a single arm. The pole is a round-tapered seamless tube and the arm is a cylindrical stainless-steel tube. The bronze detail is a conical cast bronze component, machined to final dimensions. The pole is, of course, CE marked.

### Installation: Direct burial.

Electrical equipment is located behind an access door mounted on a C-rail. The door is secured with 2 Torx security screws.

### Surface treatment

Pole and arms: Hot-dip galvanised according to DS/EN ISO 1461 and painted in City Swan colour TW 7310.  
Option: Available in standard RAL colours or in a specified colour.

### Luminaire

Philips CitySwan No.: CRS439.

### Painting procedure

- Degreasing
- Zinc primer: 40–60 µm
- PEF coating: 50–70 µm
- Total: 90–130 µm




reddot design award  
winner 2008



# CITY SWAN BRONZE 01

Stolpe med enkelarm

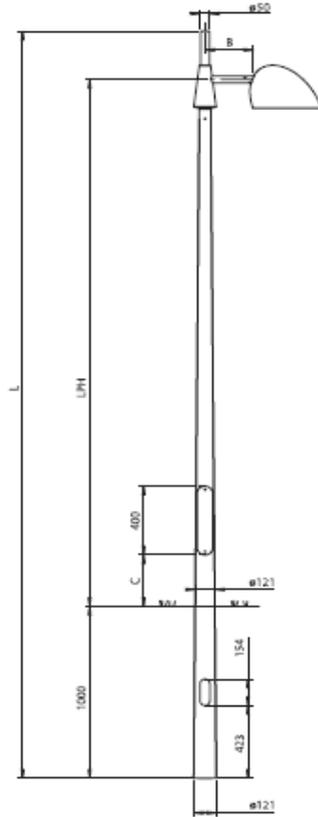

Item no.	LPH (mm)	B Outreach (mm)	I Total pole length (mm)	C (mm)	Weight (kg)
74850	3000	250	4353	300	35
74852	3500	250	4816	300	38
74875	4500	250	5852	300	48
On request	5000	250	6316	800	51
74860	3000	300	4353	300	35
74560	3500	300	4816	300	38
On request	4500	300	5852	300	48
On request	5000	300	6316	800	51
74870	3000	500	4353	300	35
74561	3500	500	4816	300	38
74562	4500	500	5852	300	48
74563	5000	500	6316	800	51



## CITY SWAN BRONZE 02



### Description / Materials

City Swan Bronze 02 is a lighting pole with a double arm. The pole is a round-tapered seamless tube and the arm is a cylindrical stainless-steel tube. The bronze detail is a conical cast bronze component, machined to final dimensions. The pole is, of course, CE marked.

### Installation: Direct burial.

Electrical equipment is located behind an access door mounted on a C-rail. The door is secured with 2 Torx security screws.

### Surface treatment

Pole and arms: Hot-dip galvanised according to DS/EN ISO 1461 and painted in City Swan colour TW 7310.  
Option: Available in standard RAL colours or in a specified colour.

### Luminaire

Philips CitySwan No.: CRS439.

### Painting procedure

- Degreasing
- Zinc primer: 40–60 µm
- PEF coating: 50–70 µm
- Total: 90–130 µm




reddot design award  
winner 2008

**DAV**

# CITY SWAN BRONZE 02

Pole with double arm

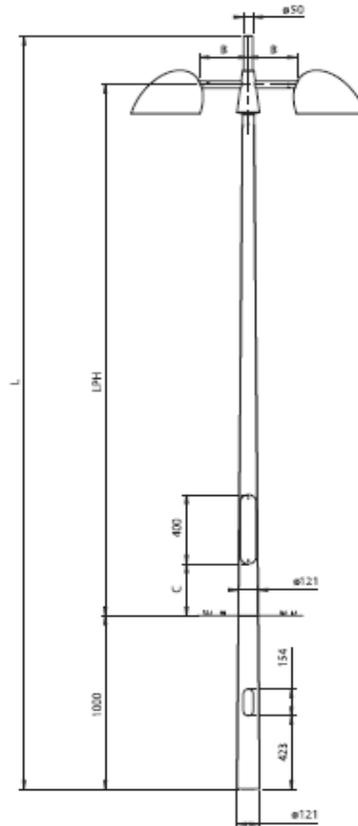

Item no.	LPH (mm)	B Outreach (mm)	I Total pole length (mm)	C (mm)	Weight (kg)
74880	3000	250	4353	300	36
On request	3500	250	4816	300	39
On request	4500	250	5852	300	49
On request	5000	250	6316	800	52
74890	3000	300	4353	300	36
On request	3500	300	4816	300	39
On request	4500	300	5852	300	49
On request	5000	300	6316	800	52
74900	3000	500	4353	300	36
74903	3500	500	4816	300	39
74911	4500	500	5852	300	49
On request	5000	500	6316	800	52



## CITY SWAN BRONZE 03



### Description / Materials

City Swan Bronze 03 is a lighting pole with triple arm. The pole is a round-tapered seamless tube and the arm is a cylindrical stainless-steel tube. Bronze detail in cast bronze with textured surface. The pole is, of course, CE marked.

### Installation: Direct burial.

Electrical equipment is located behind an access door mounted on a C-rail. The door is secured with 2 Torx security screws.

### Surface treatment

Pole and arms: Hot-dip galvanised according to DS/EN ISO 1461 and painted in City Swan colour TW 7310. Option: Available in standard RAL colours or in a specified colour.

### Luminaire

Philips CitySwan No.: CRS439.

### Painting procedure

- Degreasing
- Zinc primer: 40–60 µm
- PEF coating: 50–70 µm
- Total: 90–130 µm




reddot design award  
winner 2008



# CITY SWAN BRONZE 03

Pole with triple arm

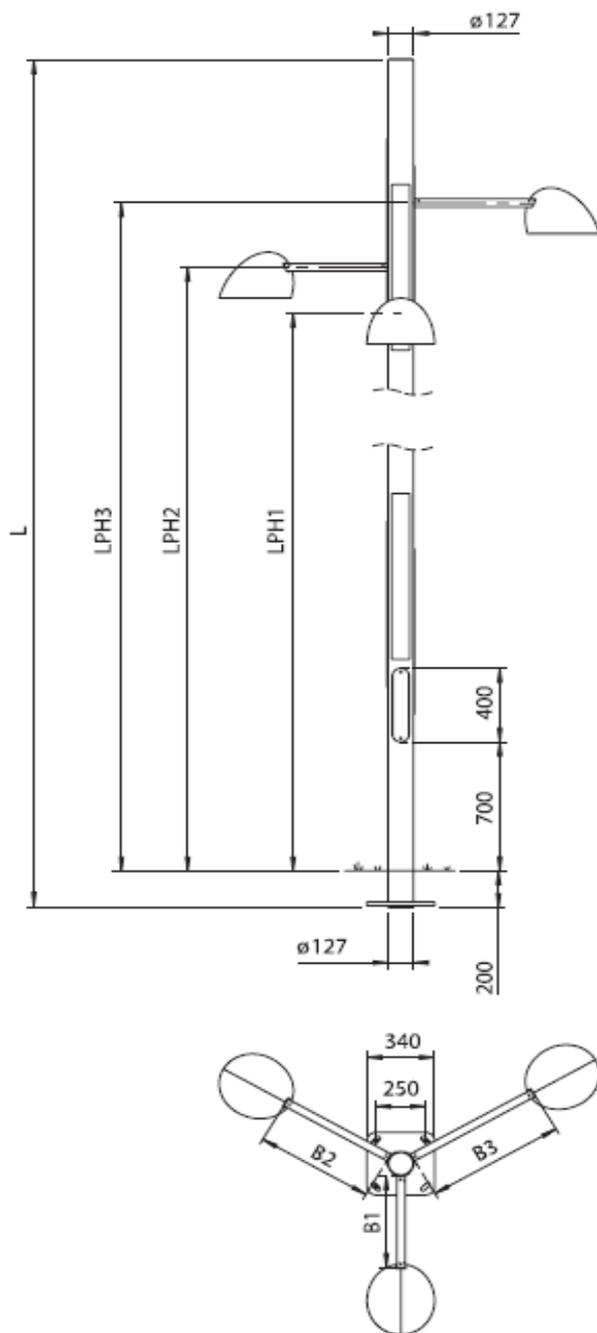

Item no.	L (mm)	LPH 1 (mm)	LPH 2 (mm)	LPH 3 (mm)	B1 (mm)	B2 (mm)	B3 (mm)	Weight (kg)
74914	5500	4117	4367	4717	500	600	700	126



## CITY SWAN WALL BRACKET



### Description / Materials

The City Swan wall bracket is cast in aluminium and is CE marked.

### Installation

Mounted to wall with flange.

### Surface treatment

Pole and arms: Hot-dip galvanised according to DS/EN ISO 1461 and painted in City Swan colour TW 7310.  
Option: Available in standard RAL colours or in a specified colour.

### Luminaire

Philips CitySwan No.: CRS439.

### Painting procedure

- Degreasing
- Zinc primer: 40–60 µm
- PEF coating: 50–70 µm
- Total: 90–130 µm



Den Danske Designpris  
2010/11





reddot design award  
winner 2008

**DAV**

# CITY SWAN WALL BRACKET

Arm för montering på t.ex. vägg

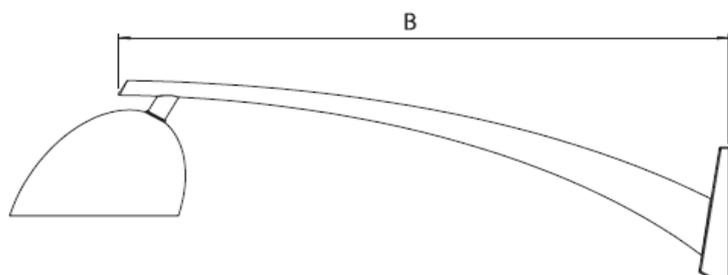

Item no.	B Outreach (mm)	Weight (kg)
74533	735	4
74535	1335	7



## CITY SWAN BASIC



### Description / Materials

City Swan Basic is a lighting pole with a straight single arm. Both pole and arm are made from cylindrical tubes. The pole is decorated with a bronze recess at the transition between pole and arm. CE marked.

### Installation: Direct burial.

Electrical equipment is located behind an access door mounted on a C-rail. The door is secured with 2 Torx security screws.

### Surface treatment

Pole and arms: Hot-dip galvanised according to DS/EN ISO 1461 and painted in City Swan colour TW 7310. Option: Available in standard RAL colours or in a specified colour.

### Luminaire

Philips CitySwan CRS439 and other standard luminaires with Ø48 connection.

### Painting procedure

- Degreasing
- Zinc primer: 40–60 µm
- PEF coating: 50–70 µm
- Total: 90–130 µm




reddot design award  
winner 2008



# CITY SWAN BASIC

Pole with single arm,  
 $\text{Ø}48,3$

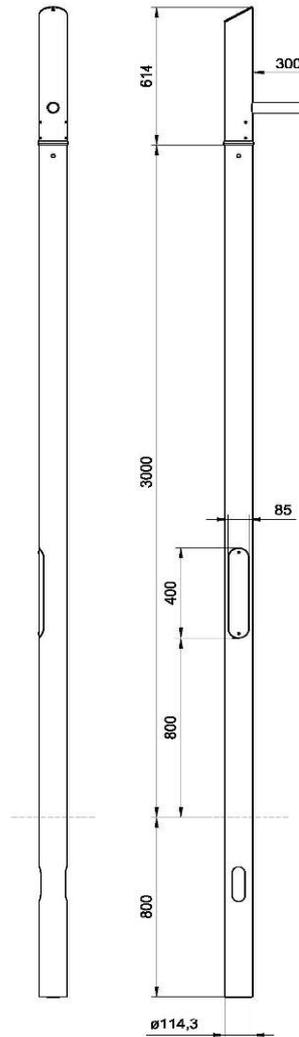

Item no.	LPH (mm)	B Outreach (mm)	L Total pole length (mm)	Weight (kg)
74800	3000	300	4414	48
74804	3500	300	4914	53
74812	4500	300	6114	64
74816	5000	300	6614	69
74820	3000	500	4414	49
74824	3500	500	4914	54
74832	4500	500	6114	65
74836	5000	500	6614	70



# CITY SWAN HIGH 01



## Description / Materials

City Swan High 01 is a lighting pole with single arm and brace. Pole and arm made of cylindrical seamless tube and round steel. CE marked.

## Installation: Direct burial.

Electrical equipment is located behind an access door mounted on a C-rail. The door is secured with 2 Torx security screws.

## Surface treatment

Pole and arms: Hot-dip galvanised according to DS/EN ISO 1461 and painted in City Swan colour TW 7310.  
Option: Available in standard RAL colours or in a specified colour.

## Luminaire

Philips CitySwan CRS439 and other standard luminaires with Ø48 connection.

## Painting procedure

- Degreasing
- Zinc primer: 40–60 µm
- PEF coating: 50–70 µm
- Total: 90–130 µm




reddot design award  
winner 2008



# CITY SWAN HIGH 01

Pole with single arm and brace

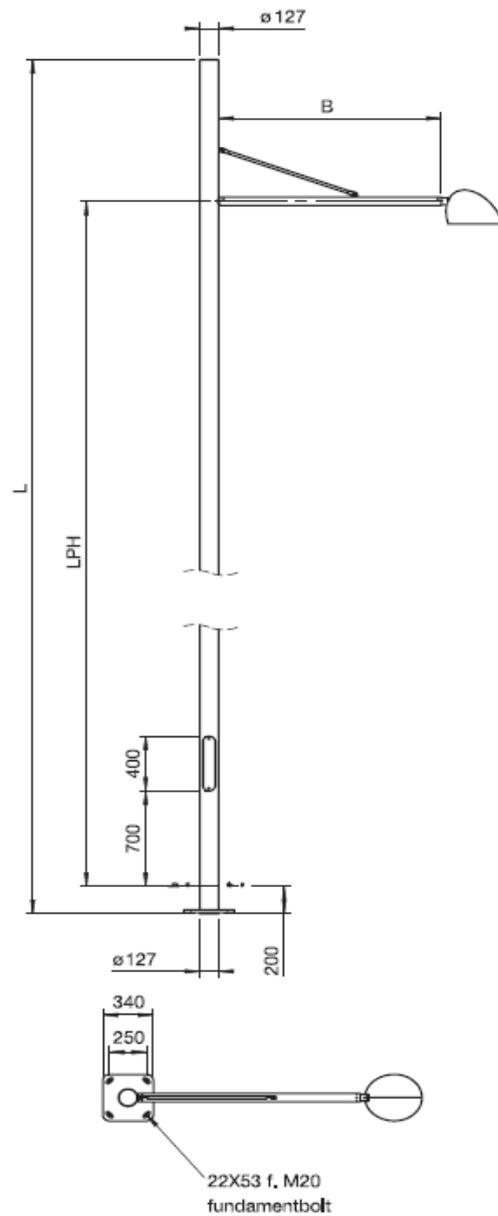

Item no.	LPH (mm)	B Outreach (mm)	L Total pole length (mm)	Weight (kg)
74924	6660	1500	7900	125
74920	5660	1500	6900	113
74928	6660	1900	7900	128
74922	5660	1900	6900	116



## CITY SWAN HIGH 02



### Description / Materials

City Swan High 02 is a lighting pole with double arm and brace. Pole and arm made of cylindrical seamless tube and round steel. CE marked.

### Installation: Direct burial.

Electrical equipment is located behind an access door mounted on a C-rail. The door is secured with 2 Torx security screws.

### Surface treatment

Pole and arms: Hot-dip galvanised according to DS/EN ISO 1461 and painted in City Swan colour TW 7310. Option: Available in standard RAL colours or in a specified colour.

### Luminaire

Philips CitySwan CRS439 and other standard luminaires with Ø48 connection.

### Painting procedure

- Degreasing
- Zinc primer: 40–60 µm
- PEF coating: 50–70 µm
- Total: 90–130 µm




reddot design award  
winner 2008



# CITY SWAN HIGH 02

Pole with doublearm and brace

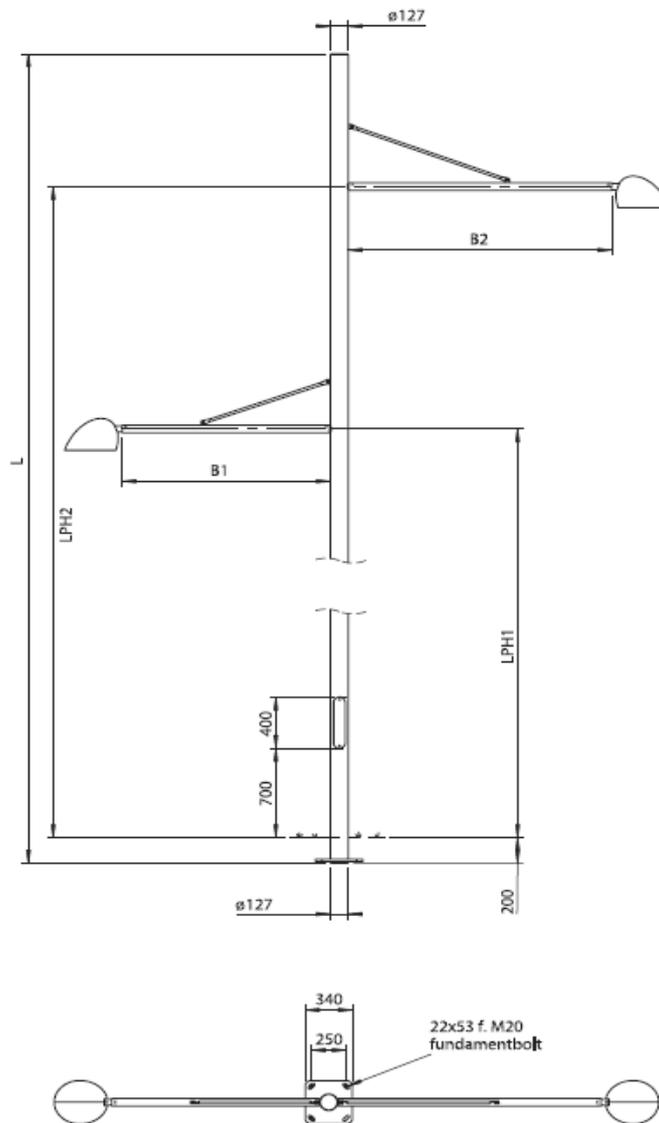

Item no	LPH 1 low (mm)	LPH 2 high (mm)	B 1 Outreach (mm)	B 2 Outreach (mm)	L Total pole length (mm)	Weight (kg)
74943	4760	6600	1500	1900	7900	137
74941	3760	5660	1500	1900	6900	125

DAV NORDIC A/S  
Tietgensvej 12  
DK-8600 Silkeborg

DAV NORDIC A/S  
Pilebækvej 5  
DK-4632 Bjæverskov

DAV NORDIC A/S  
+45 86822900  
info@davnordic.dk

