



CYLINDRICAL TUBULAR POLES



Description / Materials

Lighting pole for top mounting with top spigot.

Pole: Welded seamless cylindrical tube. Steel S235.

CE marked in accordance with DS/EN 40-5:2005-05-24.

Designed for terrain category II, basic mean wind speed 24 m/s.

Installation

Pole: For direct burial.

Electrical equipment behind flush-mounted access door on C-rail.

The door is secured with 2 Torx security screws.

Surface treatment


Pole: Hot-dip galvanised in accordance with DS/EN ISO 1461.

Options: Wet painting or powder coating in any RAL colour.

Luminaire

Max. luminaire weight: 50 kg.

FOR DIRECT BURIAL AND TOP MOUNTING WITH TOP SPIGOT

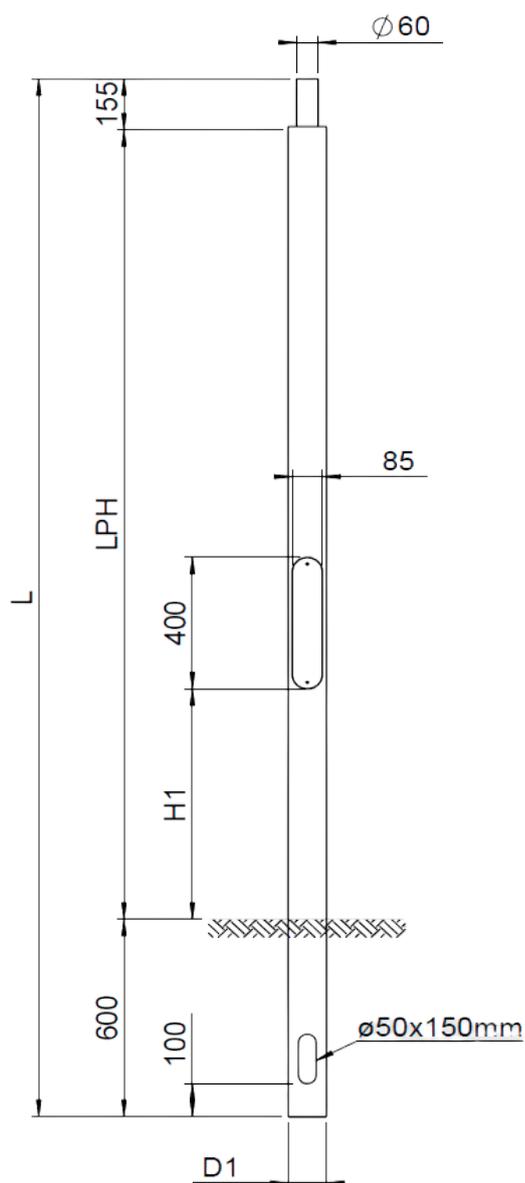

Item no.	LPH (mm)	L (mm)	hw1 (mm)	D1	Max wind load m ² /luminaire	Weight (kg)
-	4700	5455	515	$\phi 114$	0,50	55
74406	3400	4155	800	$\phi 114$	1,00	43
74408	4400	5155	800	$\phi 114$	0,60	53
79285	4900	5655	800	$\phi 114$	0,50	58

DAV NORDIC A/S
Tietgensvej 12
DK-8600 Silkeborg

DAV NORDIC A/S
Pilebækvej 5
DK-4632 Bjæverskov

DAV NORDIC A/S
+45 86822900
info@davnordic.dk

