



LUNIK ARMS



Description / Materials

Lighting pole with a cylindrical steel base section, featuring an integrated 360° white marker light installed at the top of the base section, before the transition to the pole shaft for the top-mounted luminaire.

Installation

Installation on flange foundation or for direct burial. Electrical equipment is mounted behind the cover on a C-rail. The cover is secured with two Torx security screws.

Top luminaire mounting

Ø60 x 100 mm. The pole can be combined with a wide range of luminaires as well as different types of arms.


Marker light

Integrated into the pole and positioned at either 1.20 m or 1.50 m above ground level. Provides 360° illumination around the pole and is visible up to 100 metres. Power consumption of LED and transformer is 3 watts. LEDs are supplied as standard in white and blue.

Surface treatment

Hot-dip galvanised in accordance with DS/EN 1461 or painted in an optional colour according to the RAL scale.

LUNIK MASTER

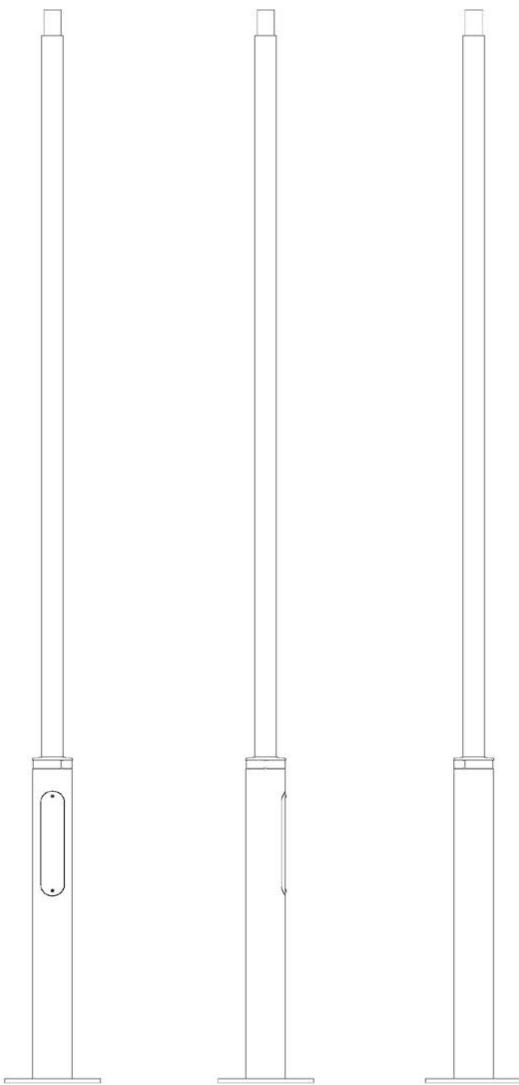

Item no.	Description	Lph (mm)	Base Ø	Top Ø	Access door	Foundation	Weight (kg)
74473	Lunik pole	3500	Ø140	Ø76	85x400	M20x250x250	40
74474	Lunik pole	4000	Ø140	Ø76	85x400	M20x250x250	43
74475	Lunik pole	5000	Ø140	Ø76	85x400	M20x250x250	49
74476	Lunik pole	6000	Ø140	Ø76	85x400	M20x250x250	55

DAV NORDIC A/S
Tietgensvej 12
DK-8600 Silkeborg

DAV NORDIC A/S
Pilebækvej 5
DK-4632 Bjæverskov

DAV NORDIC A/S
+45 86822900
info@davnordic.dk

DAV